



LYRA EVO

Item code **LV1301**
Descriptive code **LV22N10ABRT**

CE  IP40 IK08

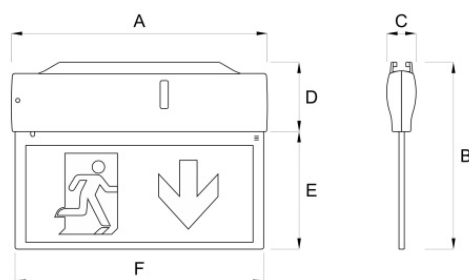

A=289mm B=211mm C=34mm
D=77mm E=134mm F=280mm

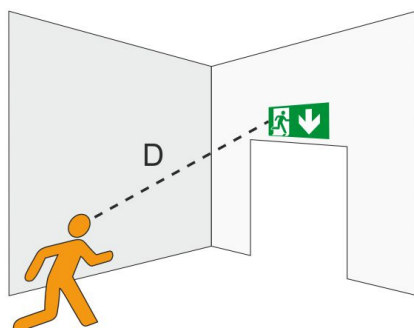

Signaling visibility: 22 meters

Luminaire description

- LYRA EVO 22M 1H NM/M IP40 ENERGY TEST

Technical characteristics

- Test button
- Function: Energy Test (Self-contained with self-diagnosis)
- Duration: 1h
- Type: NM/M (Non-Maintained/Maintained)
- Maintained mode can be turned on/off with an external switch
- Battery: Ni-Cd 4,8V 0,5Ah
- Battery type: Nickel Cadmium
- Recharge time: 12h
- Battery status: battery disconnection warning
- Power supply: 230Vac
- Input power with charged battery: 1,7W
- Insulation class: II
- Protection degree: IP40
- Protection degree against mechanical impacts: IK08
- Working temperature: 0°C to +40°C
- Colour: Grey
- Signaling visibility (EN 1838): 22 meters
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 1838, EN 7010
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Kit of pictograms included
- Installation: ceiling, flag-style, recessed*, 503 box recessed*, suspended* (* with accessory)
- 5 year warranty

Light source characteristics

- Type: LED
- Lamps: 16 LED
- Color temperature: 6000K



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021

TECHNICAL SHEET

Signalling luminaire

LYRA EVO

Item code **LV1301**

Descriptive code **LV22N10ABRT**

Standard accessories



A031

CLASP FOR FLAG-STYLE FASTENING LYRA EVO



A033

CLASP FOR CEILING FASTENING LYRA EVO



A161

PICTOGRAMS FOR ASTRA, LYRA EVO 22M



A164

PICTOGRAMS FOR LYRA EVO 22M

Mounting accessories



A016

PROTECTIVE GRATING



A032

CLASP FOR WALL FASTENING LYRA EVO



A034

KIT FOR FALSE CEILING WITH INOX STEEL SHEET



A035

KIT FOR SUSPENSION INSTALLATION LYRA EVO



A282

PICTOGRAM FOR LYRA EVO 22M DOWN DIRECTION LEFT



A284

KIT FOR FALSE CEILING WITH WHITE METAL SHEET

Pictograms



A277

PICTOGRAM 22M DOWN DIRECTION LEFT



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021

TECHNICAL SHEET

Signalling luminaire

LYRA EVO

Item code **LV1301**

Descriptive code **LV22N10ABRT**

Commander



A350

CONTROLLER FOR THE REMOTE
MANAGEMENT OF REST MODE



An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice. 14/05/2021