

# Paxton Exit - E50 & E75

## System specifications

Cable Length	5m/16ft (Screw connector - None)
Cable extension length and type	<div> <math>\leq 25\text{m}/82\text{ft}</math> </div> <div> <math>\leq 100\text{m}/328\text{ft}</math> </div> <div> Belden 9538/ Belden 5506FE (USA) Belden 9540/ Belden 5306FE (USA) </div>
Additional coloured covers available	Yes
Handsfree compatible	No

## Electrical

Operating Voltage	10V - 14V DC
Current consumption	70mA

## Environment


Operating temperature	<div> <math>-20^{\circ}\text{C} - +55^{\circ}\text{C}</math> </div> <div> <math>-4^{\circ}\text{F} - +131^{\circ}\text{F}</math> </div>
Moisture resistance	No
Vandal Resistance	Medium



Exit buttons may be used with Compact, Switch2, Net2 or Paxton10 systems. They are supplied with a choice of black or white covers. The E series exit buttons are available in three sizes and are only suitable for interior use.

The E75 exit button fits on a standard UK recessed backbox.

The green LED is lit continuously. When the exit button is pressed, the green LED flashes to indicate that the door is unlocked (only when used with Switch2 and Net2).

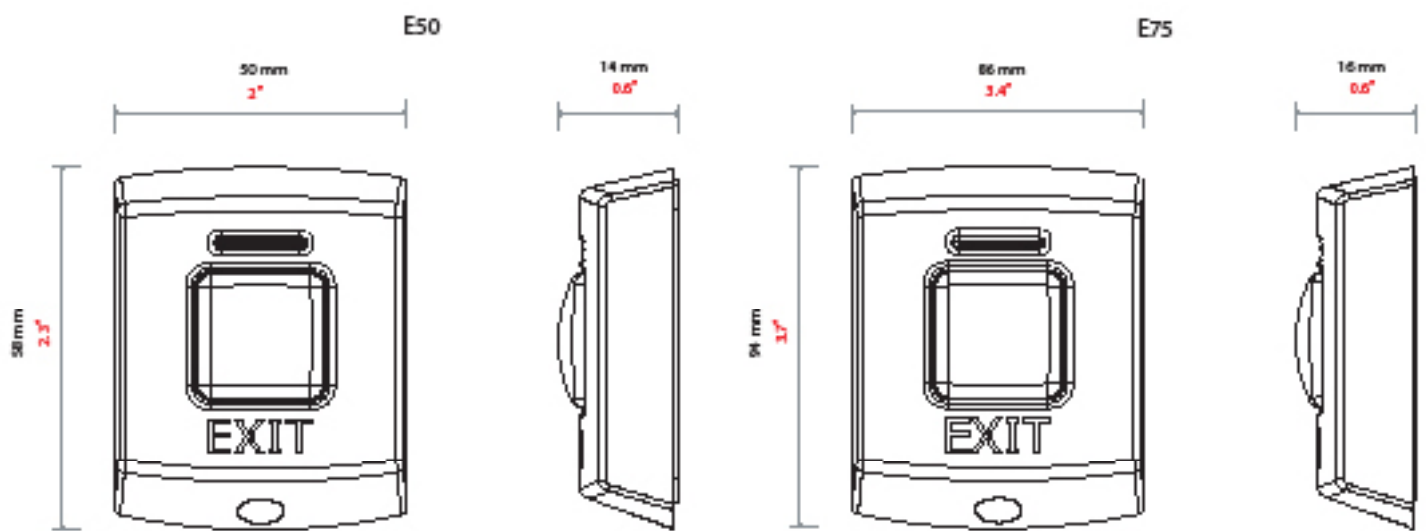

Accessories and sales codes

Paxton Exit button - E50

356--310

Paxton Exit button - E75

376-310

